

G 40

Granulators

Mod. G40-70

Mod. G40-90

Caratteristiche tecniche

- Ideali per iniezione, soffiaggio, estrusione e per usi generali.
- Due modelli base disponibili in più di 50 versioni.
- Tramoggia ribaltabile manualmente per una facile pulizia e manutenzione.
- Camera di taglio con piastre laterali resistenti all'usura taglio a "doppia inclinazione", per ridurre il consumo di energia e la formazione di calore e polvere.
- Completamente insonorizzati per una bassa rumorosità di esercizio (opzione senza insonorizzazione).
- Vari sistemi di alimentazione e scarico, sono disponibili, come optional, per ogni esigenza del cliente.
- Sicurezze conformi alle normative CE..



Technical data

- Suitable for injection & blow moulding, extrusion and general purpose applications.
- Two basic models, over 50 versions available.
- Tilting hopper manually operated for easier cleaning and maintenance.
- Cutting chamber with side plates wear resistant.
- Advanced "Scissor" cutting action, reduces energy consumption, heat and dust generation.
- Fully sound enclosed for low operating noise level (with no sound enclosure as option).
- A range of feed and discharge options are available to meet each customers requirements.
- Safety complies with CE standard.







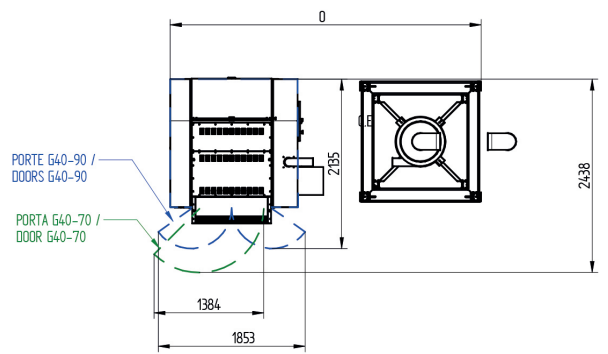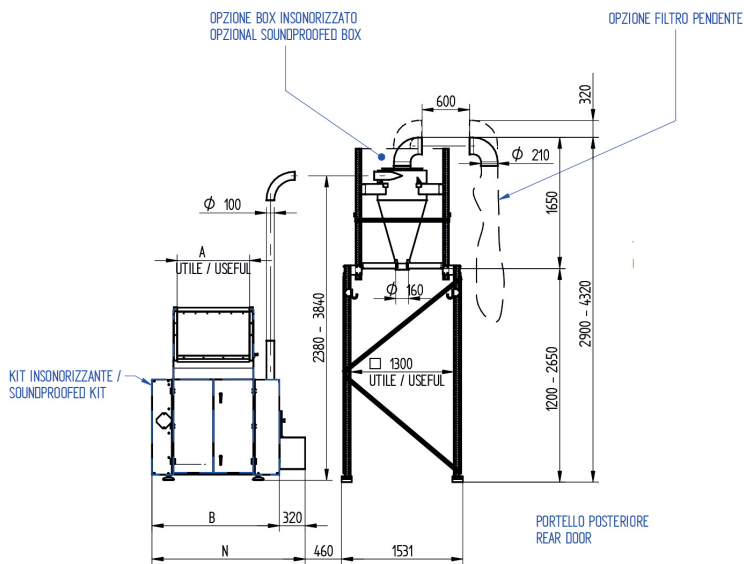



applications





	A	B	N	O
G40-70	712	1410	1735	3730
G40-90	915	1610	1935	3930



	 mm	 n°	 n°	 mm	 RPM	 Ø mm	 KW	 Kg/H
G40-70	712x530	3 (5)	2	420	450	8	22 (30)	300-500
G40-90	915x530	3 (5)	2	420	450	8	30 (37)	500-700

