

N 55

Granulators

Mod. N55-90

Caratteristiche tecniche

- Idonei per iniezione, soffiaggio, estrusione e per usi generali.
- Tramoggia ispezionabile per una facile pulizia e manutenzione.
- Camera di taglio con dischi e piastre laterali resistenti all'usura
- Taglio a "doppia inclinazione" con lame regolabili per ridurre il consumo di energia e la formazione di calore e polvere.
- Vari sistemi di alimentazione e scarico, sono disponibili, come optional, per ogni esigenza del cliente.
- Sicurezze conformi alle normative CE.




Technical data

- Suitable for injection & blow moulding, extrusion and general purpose applications.
- Hopper with inspection door for easier cleaning and maintenance.
- Cutting chamber with discs and plates wear resistant.
- Advanced "Scissor" cutting action with adjustable rotor blades, reduces energy consumption, heat and dust generation.
- A range of feed and discharge options are available to meet each customers requirements.
- Safety complies with CE standard.







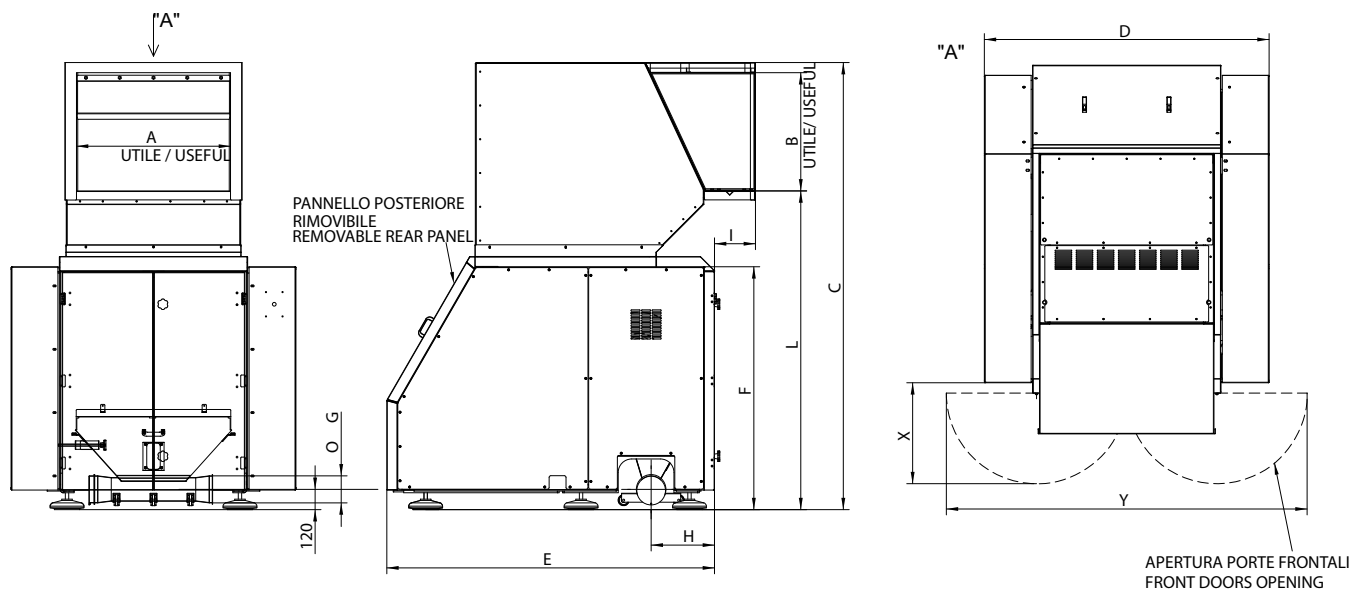

applications





GRANULATORE GRANULATOR	A	B	C	D	E	F	G	H	I	L	X	Y
N55-90-SE	912	700	2647	1686	1940	1438	160	375	243	1887	600	2140



	 mm	 n°	 n°	 mm	 RPM	 Ø mm	 Kg/h	 KW
N55-90	700x912	3	2	560	450	8	700-1000	37 (45-55)